




# Fuse Box Specification

<b>Color</b>	Black box with transparent cover
<b>Ampere</b>	Input 80A, Output 16A
<b>Voltage</b>	Input 500VAC, Output 450VAC
<b>Cross section</b>	4 ~ 35mm <sup>2</sup>
<b>Conductor fixing material</b>	PA66
<b>Conductor material</b>	H62 copper x4
<b>Connect method</b>	M3 screws and
<b>Box fixing method</b>	Fixing lugs
<b>Housing material</b>	PC V2 Fire Retardant
<b>IP code</b>	IP54
<b>Working temperature</b>	T110
<b>Certificate</b>	CE


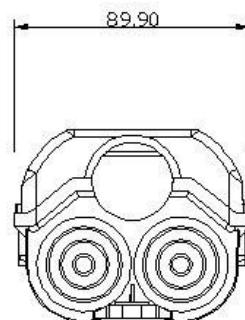


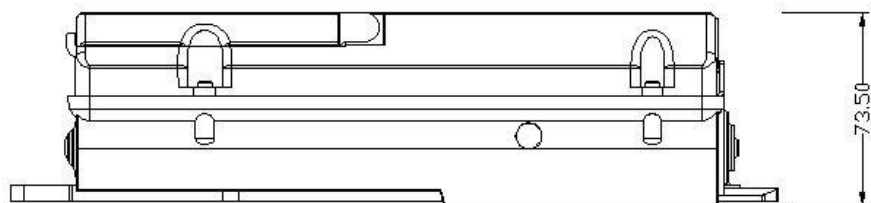

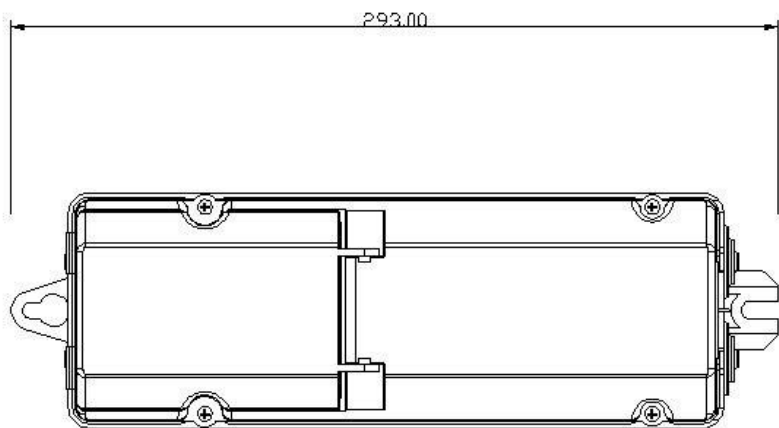


保险丝  
FUSE


防雷器  
SPD(Surge Protector)

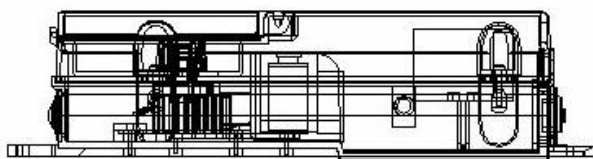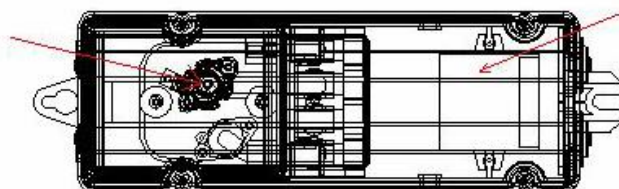

73.50



73.50

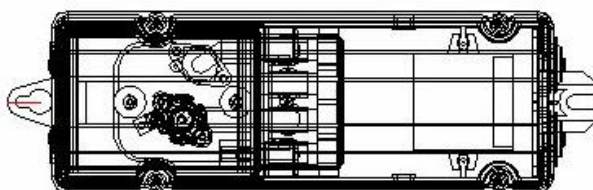

89.90



293.00